



# Typical Installation of Alex-Tronix LS Solenoid. (Irritrol 205TF used for this example -- Other Valves Similar.)




### Compatibility Certified Models:

Baccara.....	G75.....	No extra O-ring Required.
Bermad.....	200.....	No extra O-ring Required.
Buckner/Storm... VB.....		Use -015 O-ring.
DIG.....	PN10.....	No extra O-ring Required.
Griswold.....	2000, DWS.....	Use -015 O-ring.
Hit Products.....	310.....	Use -015 O-ring.
Hunter.....	HBV.....	Use -205 O-ring.
		Use Hunter's latching solenoid for valves not listed.
Irritrol/Richdel....	100, 205TF, 200, 300, 311, 700, .....	Use -015 O-ring.
	2700, 2711, 2713.....	Use -015 O-ring.
	2400, 2500, 2623.....	No extra O-ring Required.
Lawn Genie.....	L7010.....	Use -015 O-ring.
LR Nelson.....	7900.....	No extra O-ring Required.
Olson.....	AGV-PRO, AGV-UTL.....	No extra O-ring Required.
Orbit.....	Water Master Series.....	No extra O-ring Required.
Superior.....	950.....	Use -205 O-ring.
	450.....	No extra O-ring Required.
Toro.....	220, EZ-Flo, P-220 .....	Use -015 O-ring.

For Valves Not Listed, Contact Factory For Information.



BLACK (COMMON)

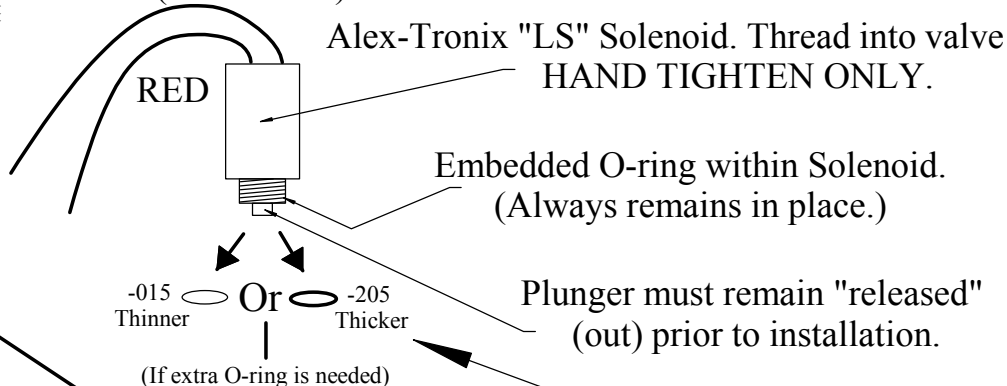

Both extra O-rings are included with each solenoid. Use correct O-ring (or none) based on your valve model shown on the chart. Discard unused O-ring(s).

